PESD1LINQ

Ultra Low Capacitance Bi-Directional TVS Diode Array


Features

- Ultra low leakage: nA level
- Low clamping voltage
- Complies with following standards:
  - – IEC 61000-4-2 (ESD) immunity test
    Air discharge: ±23kV
    Contact discharge: ±23kV
  - – IEC61000-4-4 (EFT) 40A (5/50ns)
  - – IEC61000-4-5 (Lightning) 5A (8/20μs)
- RoHS Compliant
- AEC-Q101 qualified

Dimensions SOD-323



Pin Configuration

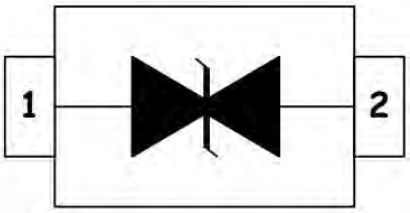

Applications

- Cell Phone Handsets andAccessories
- Microprocessor based equipment
- Personal DigitalAssistants(PDA's)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Networking and Telecom
- Serial and Parallel Ports
- Peripherals

Mechanical Characteristics

- Package: SOD-323
- Lead Finish: Lead Free
- UL Flammability Classification Rating 94V-0
- Quantity Per Reel:3000pcs
- Reel Size:7 inch
- Device Marking: AM


Absolute Maximum Ratings(Tamb=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20μs)	Ppp	250	W
ESD per IEC 61000−4−2 (Air)	V_{ESD}	± 23	kV
ESD per IEC 61000−4−2 (Contact)		± 23	
Operating Temperature Range	T_J	-55 to +125	℃
Storage Temperature Range	T_{STJ}	-55 to +150	℃


Electrical Characteristics(TA=25°C unless otherwise specified)

Symbol	Parameter	Test Condition	Pin 1 to Pin 2 (15V TVS)			Pin 2 to Pin 1 (24V TVS)			Units
			Min	Typ	Max	Min	Typ	Max	
V_{RWM}	Reverse Working Voltage				15		24		V
V_{BR}	Reverse Breakdown Voltage	I_T = 1mA	16		19	26.5		31	V
I_R	Reverse Leakage Current	$V_R = V_{RWM}$			0.2			0.2	μA
V_{C1}	Clamping Voltage 1	I_{PP} = 1A, t_p = 8/20μs			22			38	V
V_{C2}	Clamping Voltage 2	I_{PP} =5A, t_p = 8/20μs			35			51	V
C_J	Junction Capacitance 1	V_R = 0V, f = 1MHz		15			15		pF


Typical Performance Characteristics(TA=25°C unless otherwise specified)

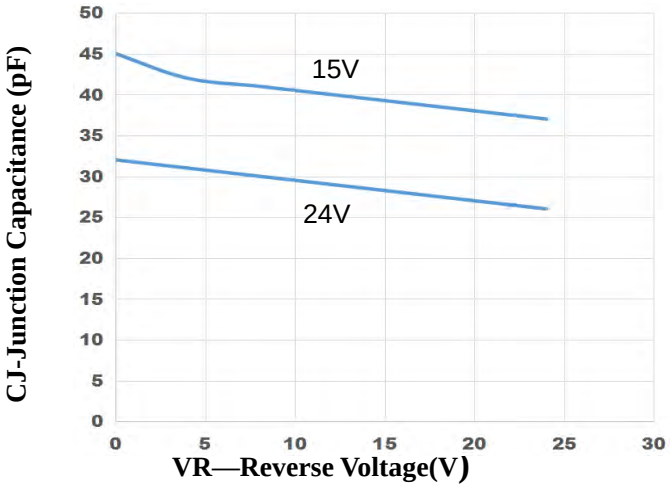


Junction Capacitance vs. Reverse Voltage

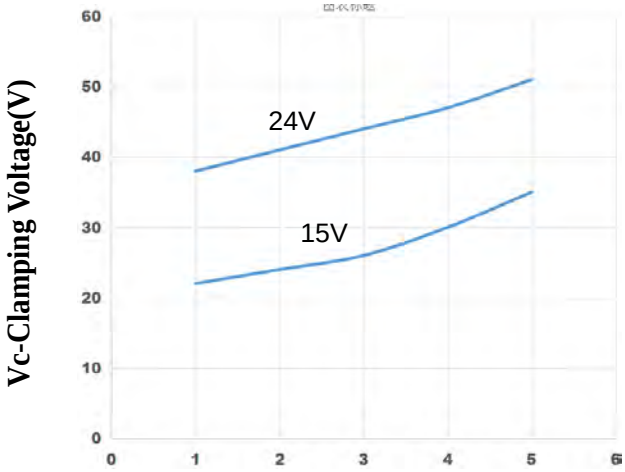


Clamping Voltage vs. Peak Pulse Current

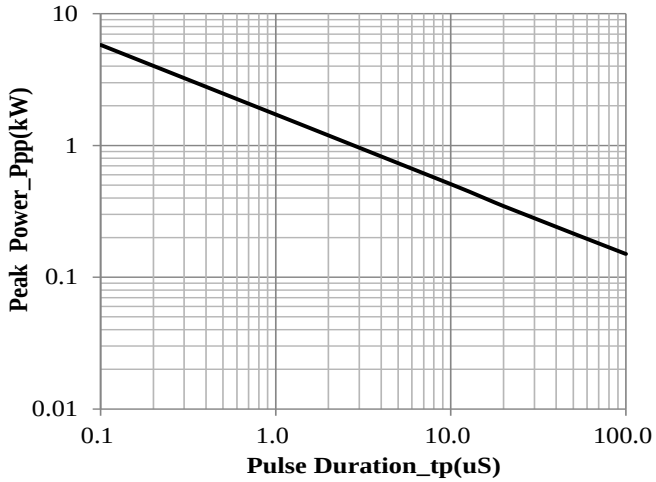


Peak Pulse Power vs. Pulse Time

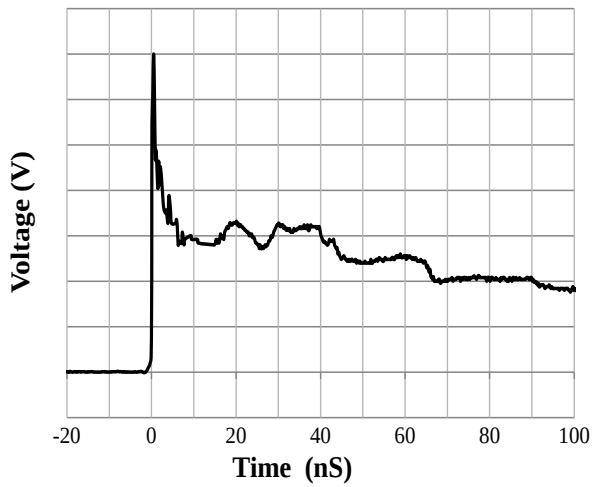

IEC61000−4−2 Pulse Waveform

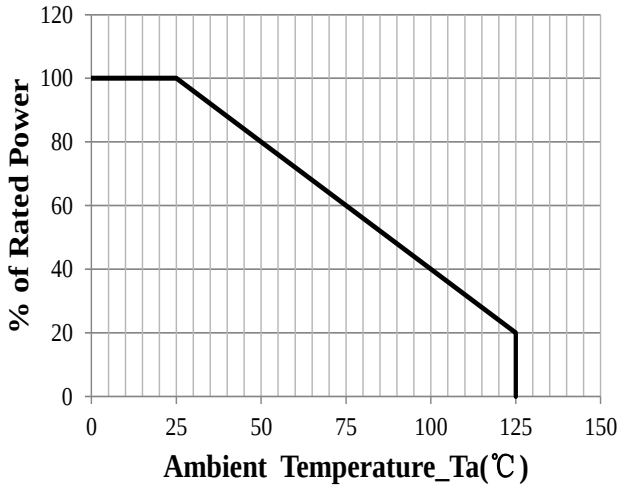



Power Derating Curve

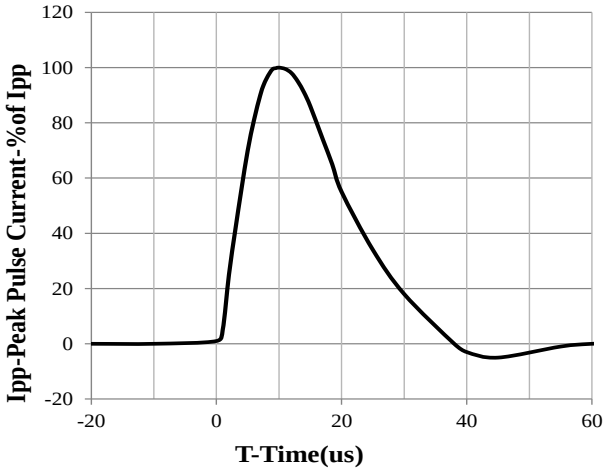


8 X 20us Pulse Waveform

SOD-323 Package Outline Dimensions

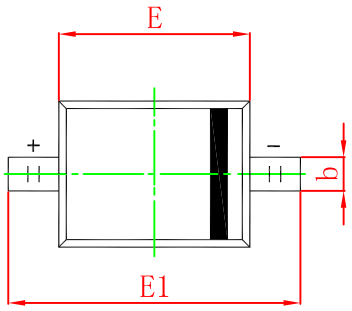




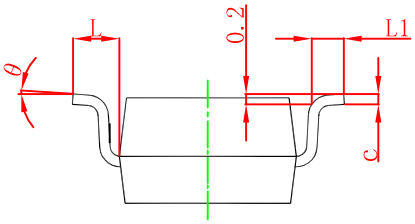

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A		1.000		0.039
A1	0.000	0.100	0.000	0.004
A2	0.800	0.900	0.031	0.035
b	0.250	0.350	0.010	0.014
c	0.080	0.150	0.003	0.006
D	1.200	1.400	0.047	0.055
E	1.600	1.800	0.063	0.071
E1	2.550	2.750	0.100	0.108
L	0.475 REF.		0.019 REF.	
L1	0.250	0.400	0.010	0.016
θ	0°	8°	0°	8°

Suggested Pad Layout

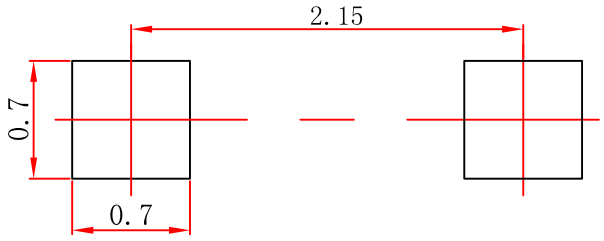

Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.

NOTICE
Leiditech reserves the right to make modifications,enhancements,improvements,corrections or other changes without further notice to any product herein. Leiditech does not assume any liability arising out of the application or use of any product described herein.

Shanghai Leiditech Electronic Technology Co., Ltd.
Email: sale1@leiditech.com
Tel : +86- 021 50828806
Fax : +86- 021 50477059